

6 doors electronic industry ESD dry cabinet



Model:SDC1428

Features:

- 1.The conductivity of the cabinet coating is 10⁶-9, which meets the ESD standards of SJ/T 10694-2006 "General Specification for Electrostatic Protection of Electronic Products Manufacturing and Application Systems".
- 2.The humidity value is controlled between 1% and 50% RH.
- 3.Environmental protection and energy saving, using physical molecular sieve dehumidification method, can be reused repeatedly, dehumidification effect is good, and low power consumption, no noise, no heat effect, no magnetic hazard.
- 4.Excellent material, the core components are Honeywell sensor imported from the United States and Sensirion humidity sensor from Switzerland.
- 5.Adopt large-size digital LED display screen of micro-computer and display temperature and humidity synchronously.

Recommended RH value for various moisture-sensitive

Condition(RH%)	Storage items
50%RH-40%RH	Tape, disk, VCD, camera, camera, lens, projector, Telescope, photographs, musical instrument, microscope, film, slides, Digital camera, tape, ancient calligraphy and painting, watercolor painting, oil painting, stamps, Coin, antique, CD. LD, photo album, mechanical drawing, advertising design, fur and industrial design etc.
40%RH-20%RH	Precision instruments, electrical and electronic products, measuring tool, precision molds, semiconductor products, capacitor, tungsten wire, battery, optical film and instruments, printed circuit boards, sensors, charger, optical lens etc.
25%RH-15%RH	Lab medicinal materials, chemical powder, sample, filter, models, seed, pollen, dry flower, tea, coffee, seaweed products, spices, dry food etc.
15%RH-1%RH	Special chemicals, precision electronic components, BGA, VCD, IC



SDC1428 ESD dry cabinet 1428L



Items	ESD Dry Cabinet For electronic industry
Model number	SDC1428
Outer size(L*W*H)	1200*710*1940mm
Inner size(L*W*H)	1198*680*1840mm
Capacity	1428L
RH control range	1%RH-10%RH
Deviation	humidity $\pm 3\%$ RH temperature $\pm 1^{\circ}\text{C}$
Pieces of door	6
Shelves	5 PCS
Shelves bearing	50KG/per shelf
Display	LED
Power	26W
Voltage	110V/220V 50HZ/60HZ OR customized
Packaged size(L*W*H)	1400mm*9500mm*2150mm
Packaged weight	300KG

SDC1428 Details

LED display



Press type lock




SDC1428 Details

Dehumidification core



SDC1428 Details

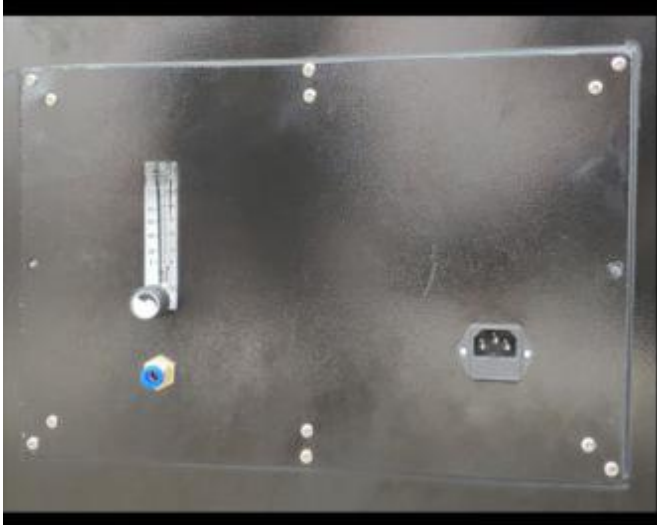


The shell is made of engineering plastics imported from South Korea, with temperature resistance of over 300 degrees, design life of over 30 years, molecular sieve dual memory alloy spring imported from Germany and Sweden, which ensures durability and fatigue resistance of the core.



Adjustable load-bearing laminates

The load-bearing capacity is strong, the single layer can bear 80KG, and the laminates can be adjusted freely.

SDC1428 Graph

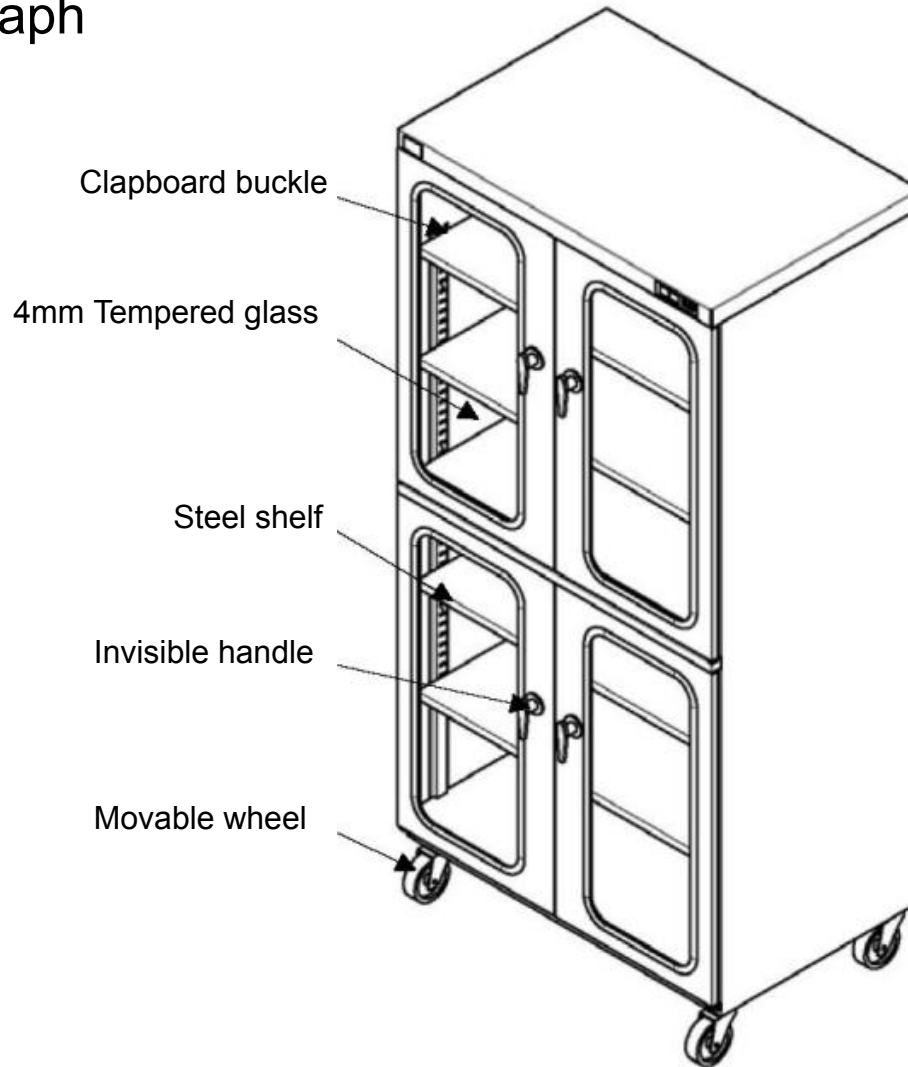

Welcome inquiry

- 1, Please visit : www.smthelp.com
- 2, Find us more: <https://www.facebook.com/autoinsertion>
- 3, Know more our team: <https://cn.linkedin.com/in/smtsupplier>
- 4, Welcome to our factory in Shenzhen China
- 5, Google: Auto+Insertion
- 6, See machine working video: youtube - Auto Insertion
- 7, Looking forward to your email: wendy@smthelp.com