


- Dimension(L*W*H) 600*650*1400mm.
- PCBSize: 50*50-445*350mm (L*W)
- Conveyor Height: 900±20mm
- PCB Direction: L to R
- Conveyor speed: 6 seconds
- Power Supply: 220V,50Hz/1Ph 100VAmax
- Capacity: 50 pcs
- Communication:SMEMA Signal
- NetWeight: 100KG

D ANCHINARY



Product features:

- - Suitable for PCB single-sided and double-sided feeding
- PLC + full-color touch screen control
- - Motor-driven push board
- Compatible with SMEMA interface

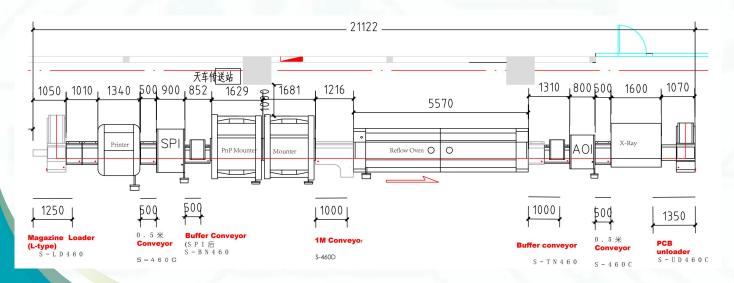






Product advantages:

- - Sturdy and stable design
- - Simple operation, with multiple sound and light alarm functions
- Equipped with photoelectric sensing protection, more safe
- Motor rotates fast and smoothly, accurate positioning



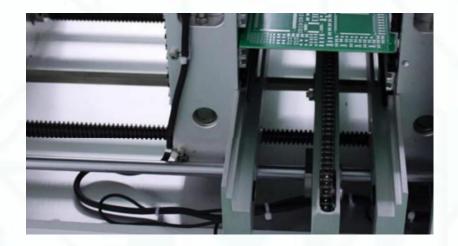

www.smthelp.com



Product benefits:

- - Improve the efficiency and quality of SMT production line
- Save space, reduce labor costs
- - Adapt to different specifications of PCB boards, easy to switch











www.smthelp.com



Best After-sales service

- 7x24 Worldwide Support
- Free Installation/ Training
 - 1 day lead-time (spare parts)
- 1 Month customize solution



Welcome Inquiry



www.smthelp.com