



AF2000 Axial Feeder


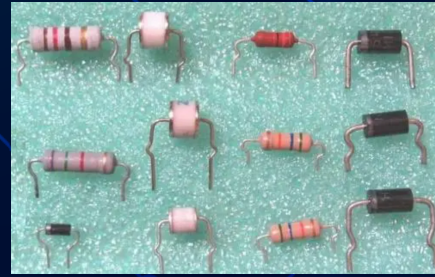


Component Body $\varnothing 2\text{-}\varnothing 10\text{mm}$
Tape pitch 5mm, 10mm, 15mm, 20mm
Lead Dia 0.4mm-1.0mm
Lead Length 2.5mm-5mm
Feeding Pneumatic drive
Cycle time 1.5s-2s
Component Range Resistor, Diode, JW
Component Input Taped package
Diminsion 700 (L)x100 (W) x165 (H)

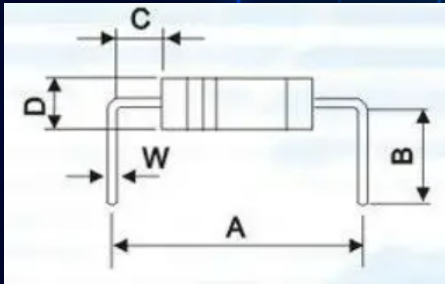


Specialized in Design and
Manufacturing THT SMT Feeder

RF1000 Radial Feeder

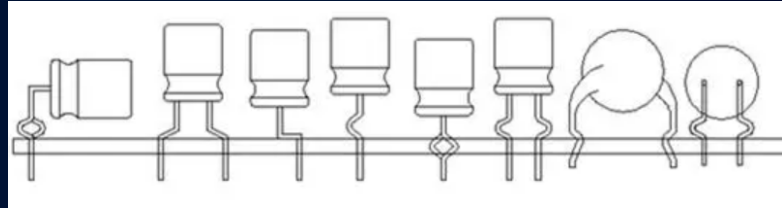
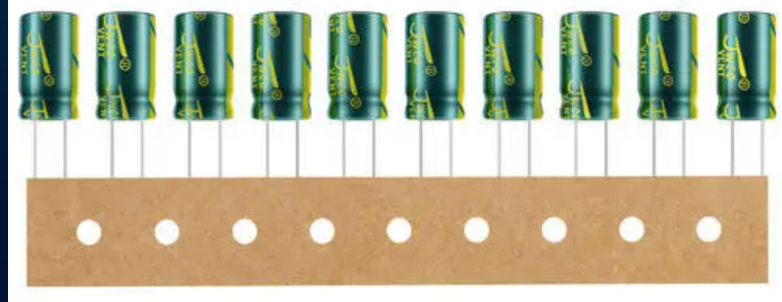


Component Body : $\varnothing 3$ - $\varnothing 10$ mm;
Retangle: W5-10mm, L5-25mm
Height 5mm-25mm
Tape pitch 12.7mm or 25.4mm
Lead Dia 0.4mm-1.0mm
Lead Span 2.5mm-25mm
Lead Length 2.5mm-5mm
Cycle time 1.5s-2s
Component Input Taped package
Dimension 500 (L)x100 (W) x165 (H)

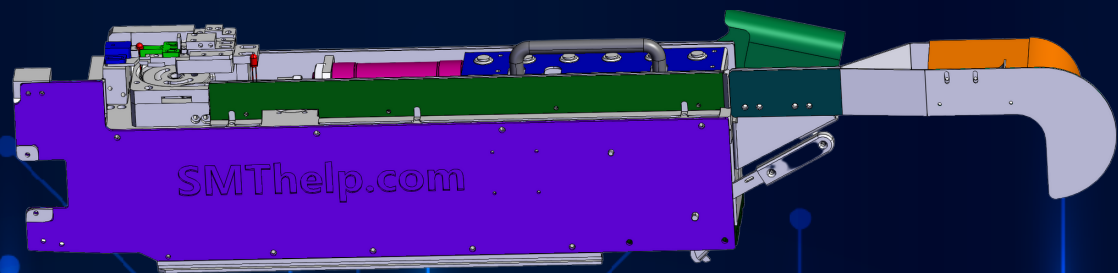

Specialized in Design and Manufacturing THT SMT Feeder

1 Machine = 10 Workers

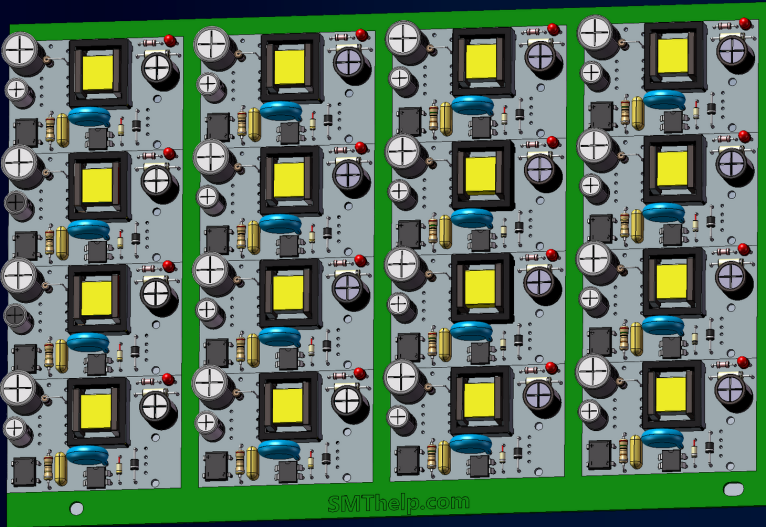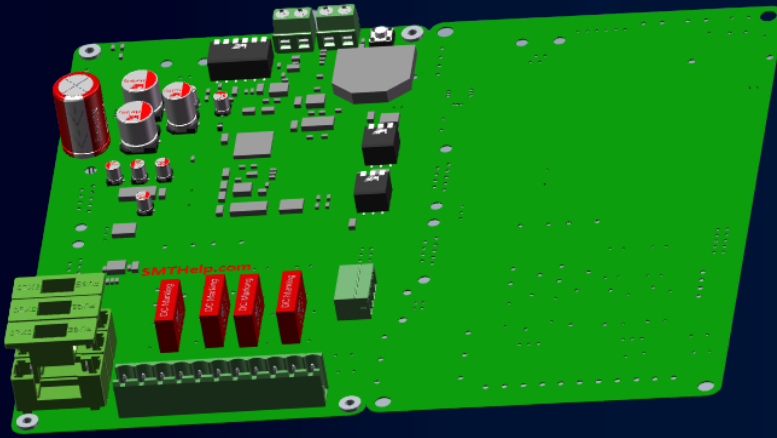

- Decreasing labor cost
- Easier manufacturing and operations management
- Predictable Product Quality – Less repairs
- No wrong parts no wrong polarity
- Less risk of damage due to human contact (contamination, ESD, physical damage to components)
- Better clinching, less risk of solder issues.
- Smaller factory space required to produce same volume of product

| Specialized in Manufacturing
THT Auto Insertion machine |

Best After-sales service

- 7x24 Worldwide Support

- Free Installation/ Training

- 1 day lead-time (spare parts)

- 1 Month customize solution

| Specialized in Manufacturing
THT Auto Insertion machine |

