




## Advantage

- ◆ Accurately realize selective area spraying of various circuit boards;
- ◆ A variety of spraying methods can complete the spraying process of high-density and complex circuit boards;
- ◆ Stable spray head for reliable uniform spraying;
- ◆ It can effectively and uniformly coat the edge of the device, can eliminate the spray shadow effect, and has high-speed, high-reliability, and high-stability transmission and control systems;
- ◆ Simple programming and high intelligence;

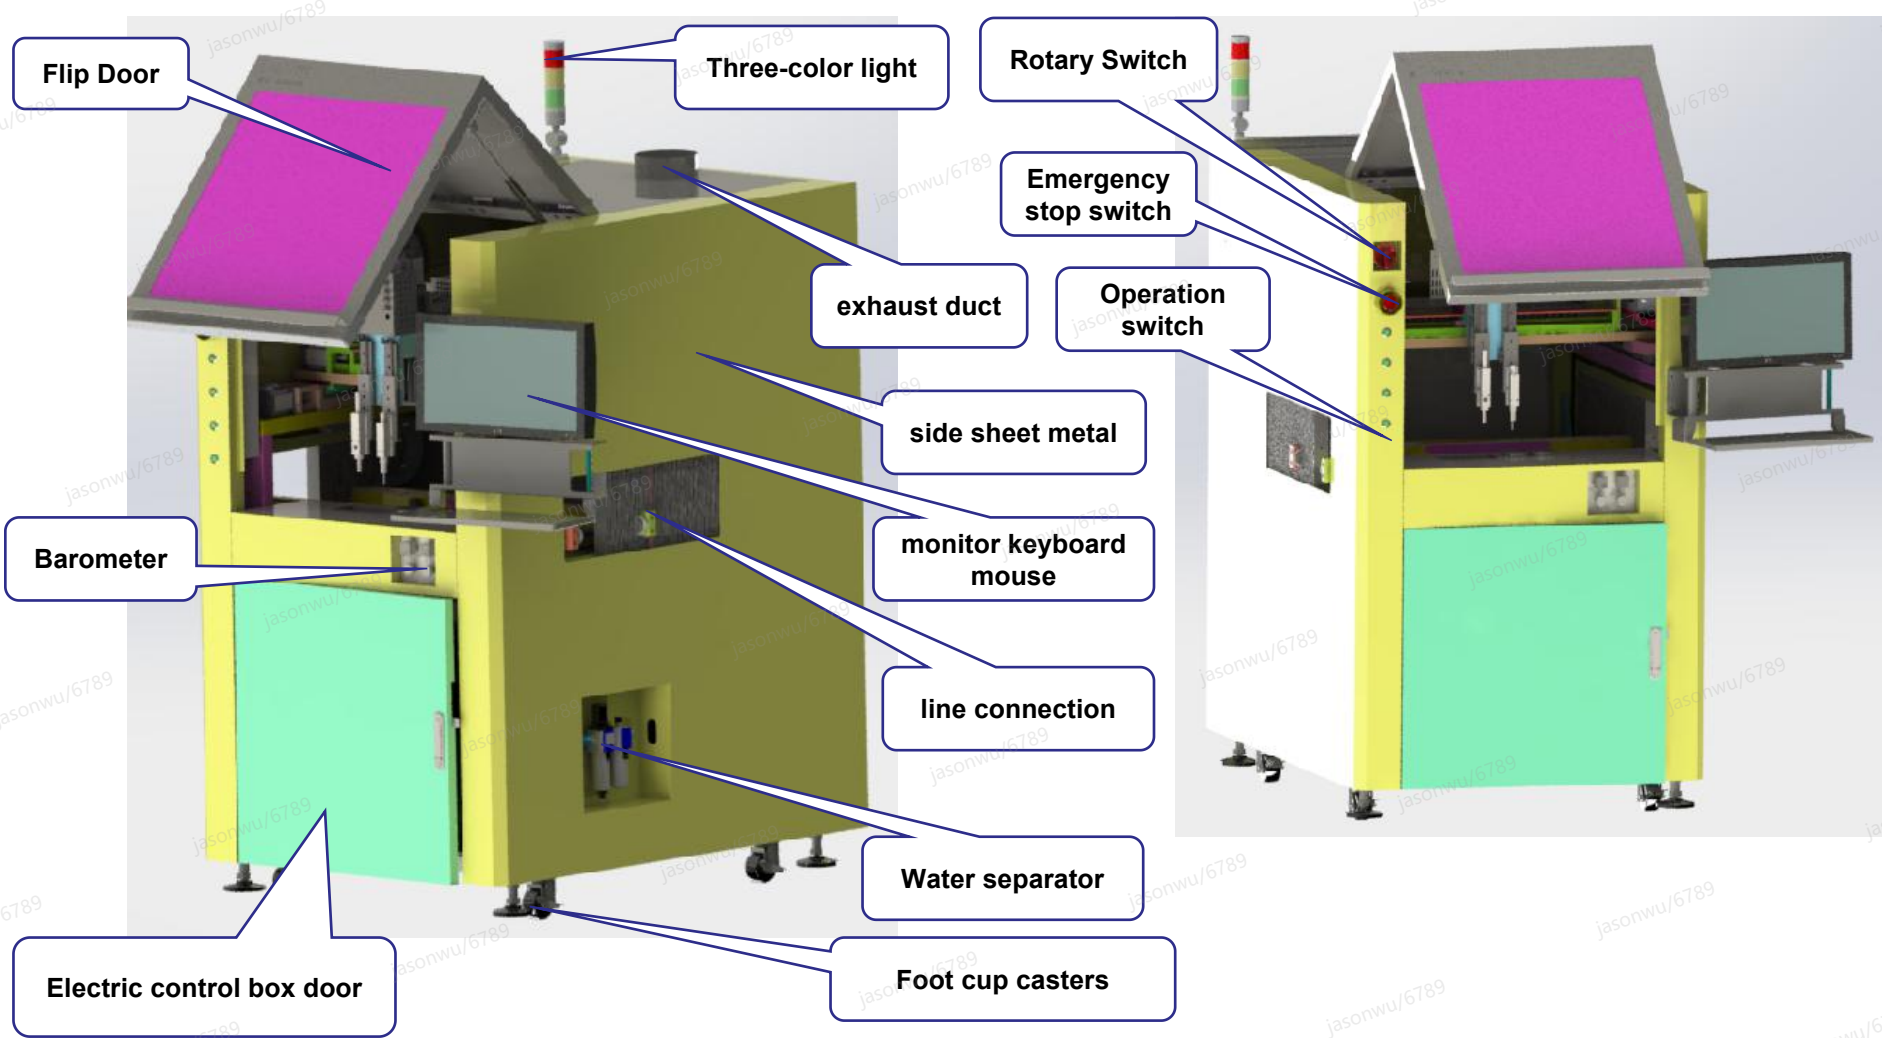

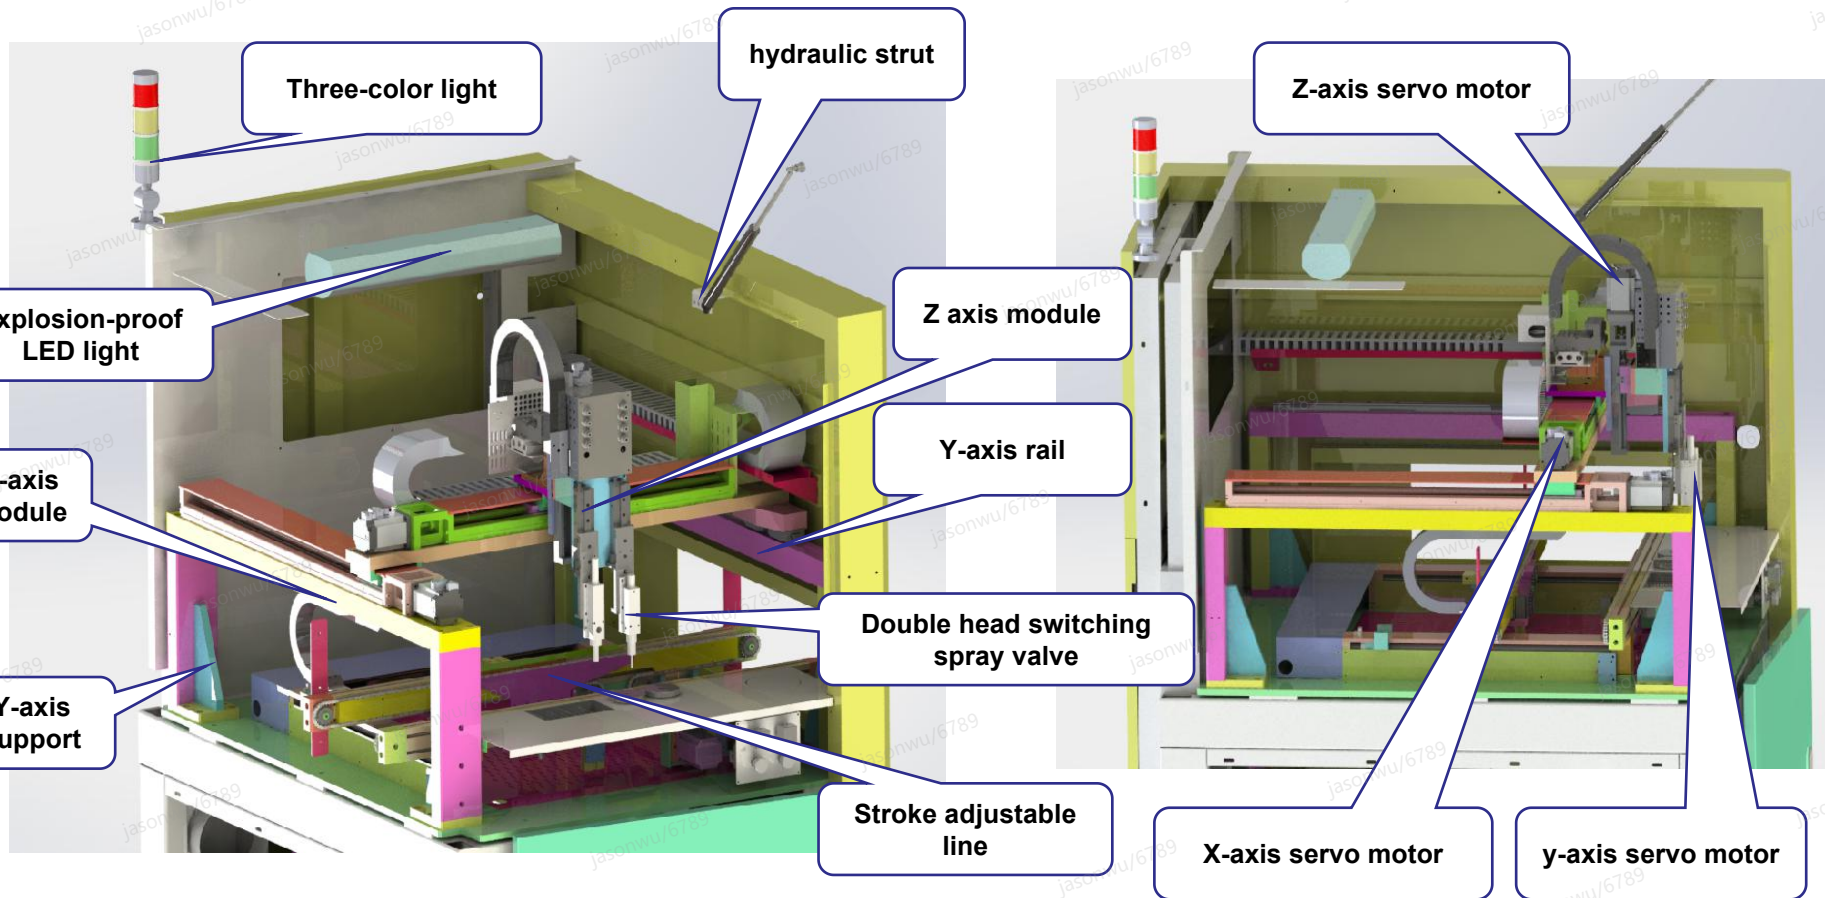


## Automatic Coating Machine

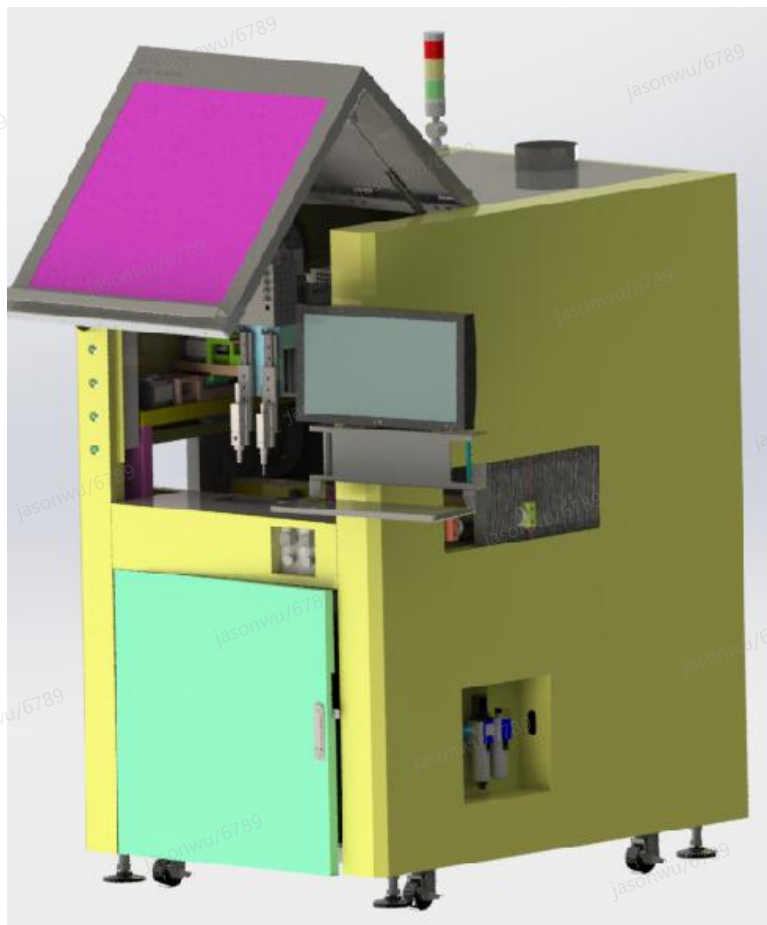

Machine Size(mm)	L1060"W1300"H1700
Weight(kg)	500
Operation method	computer control
Program storage	≥ 1000
Upper transmisson height	920±20mm
Transportation speed	Governor control 0-1350 rpm/ad
X/Y axis maximum running speed	600mm/s
X/Y running accuracy	±0.2mm
Z axis maximum running speed	300mm/s
Z running accuracy	±0.2mm
Transfer Direction	L→R (R→L)
PCB width range (mm)	50-450
PCB size(mm)	MAX: W450*L450
PCB component height	MAX: ±100mm
Fine fog flower spray width	6-8mm
Tank volume(L)	12
Detection part	UV detection light source
Valve type	1 Atomizing spray valve, 1 Dispensing valve
Power supply	AC220V 50HZ
Gas source	4-6kgf/cm <sup>2</sup>

# Best After-sales service

- **Worldwide Support**
- **Free Installation/  
Training**
- **1 day lead-time (spare  
parts)**
- **1 Month customize  
solution**

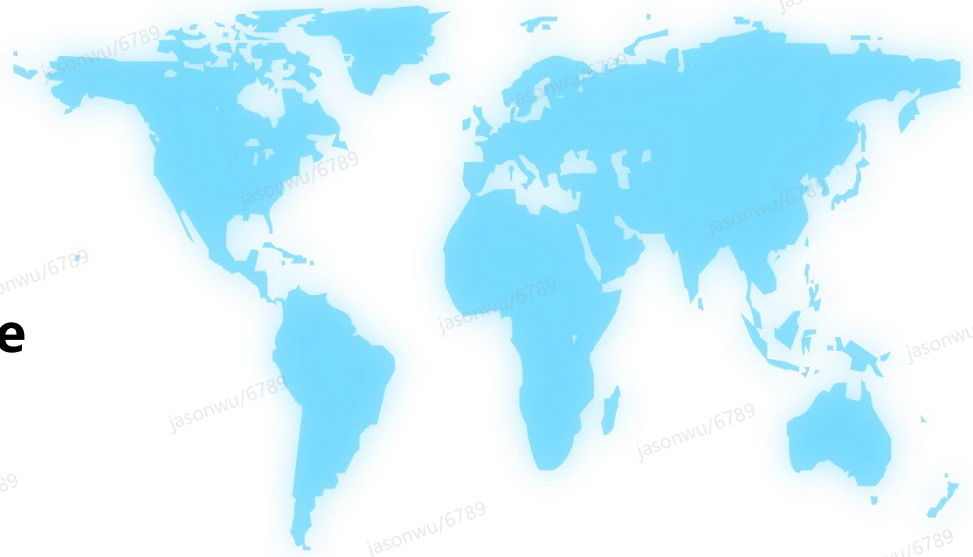

# Welcome inquiry

1. Please visit : [www.smthelp.com](http://www.smthelp.com)
2. Find us more: <https://www.facebook.com/autoinsertion>
3. Know more our team: <https://cn.linkedin.com/in/smtsupplier>
4. Welcome to our factory in Shenzhen China
5. Google: automatic tin soldering
6. Looking forward to your email: [info@smthelp.com](mailto:info@smthelp.com)