

THT Odd Form Feeder to SMT Mounter








S-MVF01 Bulk Feeder





Advantage:

Bluk feeders typically are custom made for one particular part and require a lot of space.

Our new flexible bulk Feeder is dramatically smaller than bowl feeders and can handle a range of part types.

Deminsion(L*W*H)	850*140*260mm
Power	220V
Control Circuit	Programmable
Component	Bulk component
Cycle time	≤ 1 s



Feature



Principle: Through the components selection track, NG

components through the reflux

Belt return: The selected material is transported to the component level by direct vibration

- Bulk component can be selected and loaded through the belt feeder.
- It has small size, fast replacement and low noise.
- High versatility, can realize multi-pin lead componnet versatility.
- It can be equipped with any brand of placement machine to realize bulk component feeding.
- No encapsulation, no packaging costs.



Technical parameter

Technical Parameter-1		
Deminsion	L*W*H	850*140*260mm
	Weight	12kg
Component	Туре	Connector, Buzzer, Mesh port, Terminal post, Square capacitor
	Size	3*3*3-20*20*20mm
	Feature	Components have distinct characteristics that can be physically distinguished
	Not Match	Physical characteristics are not obvious to be directional The pins are easily deformed The length-to-height ratio is less than 1:1.2
Structure Position	Packaging	Bulk
	Feeding	Motor driven belt feeding + direct vibration feeding
	Positioning	Fiber optic induction + direct vibration delay
	Fixed	Positioning key + pressing block to support other fixed structures




Technical parameter

Techinical Parameter-2		
Average current/peak current Air Operate Connect Communicate Control Motor speed	Voltage	220V/50HZ
	Average current/peak current	3A/6A
	Air	0.4-0.6Mpa
	Operate	Button operate
	Connect	8-pin ø16mm aviation plug
	Commnunicate	Support IO communication or no communication self-control
	Control	PLC
	Motor speed	500 r/min
Feeding	Feeding speed	1.5-2S
	Feeding channel	Single channel
	Speed adjust	Infinitely variable speed regulation
	Feeding accuracy	±1mm
Test record	Feeding test	Achieve 1000 times of continuous feeding without abnormality
	Aging test	Continuous operation for 48 hours without abnormalities


www.simhelp.com



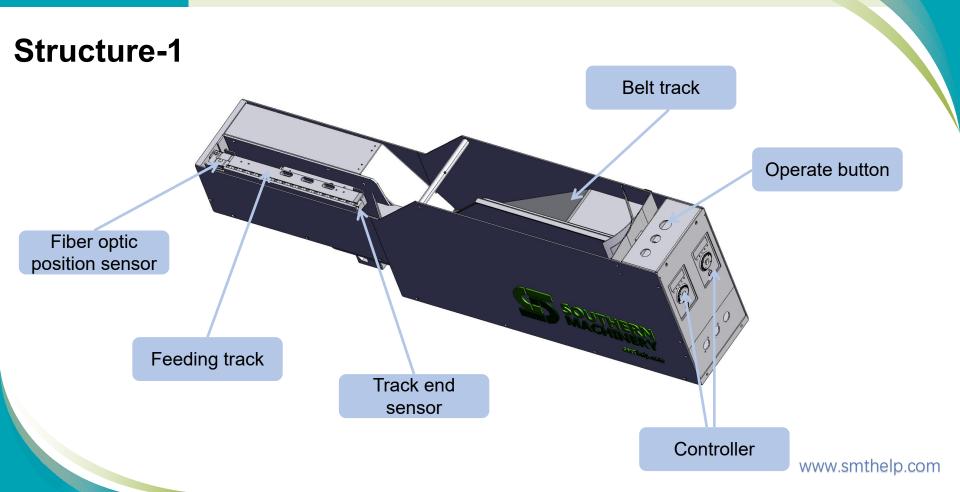



Structure-2

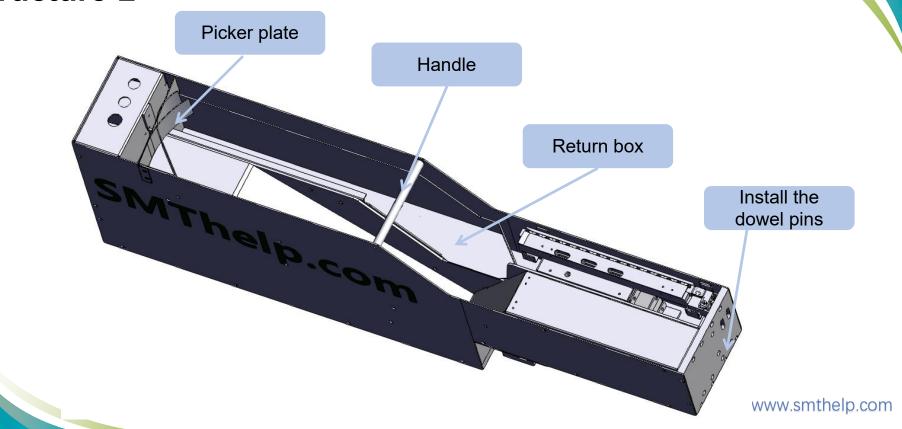



WELCOME INQUIRY

Please visit

www.smthelp.com

Find us more

https://www.facebook.com/autoinsertion

Know more our team

https://cn.linkedin.com/in/smtsupplier

Welcome to our factory in Shenzhen China

See more machine working video, please Youtube

Auto Insertion

Google

Auto+insertion, to get more informations

Looking forward to your email

info@smthelp.com