

1. S-106U Taped components lead cutting forming machine (U-K type)

Model: S-106U

Voltage: AC 220V 60Hz/50Hz

Size: L590*W460*H360MM

Weight: 70kg

Efficiency: 7200PCS/H

Characteristic:

1 suitable for tape resistor, diodes and other axial parts forming, cutting.

2 suitable for mass production, stable quality, easy to operate.

3 ultra precision splitter, make it molding and lead cutting complete meanwhile.


4 cutting tool, die using Japanese imported steel, long service life.

5 motor from Taiwan .

6 can be customized according to customer requirements mold.

7 equipment body steel plate with high quality steel, solid, thick.


8 surface blue paint for the special process, not easy to scrape off

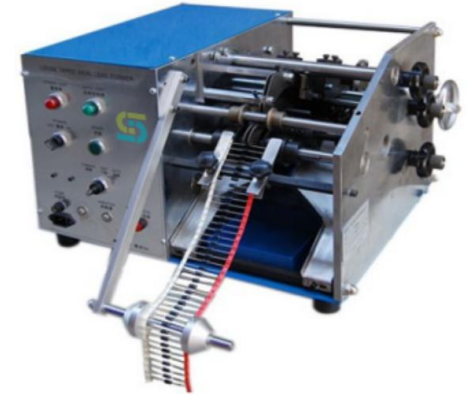

U-K type

	Description	UK type	Noted
A	Body length	3. 8-20	Adjustable
B	Body size	1. 8-9	3-6, 5-9, 1.8-3 common
C	Shoulder height	1.2(MIN)	Adjustable
D	Height	5-12.5	Fixed
E	Lead length	3(MIN)	Adjustable
S	Support point	2-3	
L	Leads' span	A+2C+W	Adjustable
W	Wire diameter	0.3-1.3	0.3-0.5;0.6-0.9;1.0-1.3 common

Unit: MM

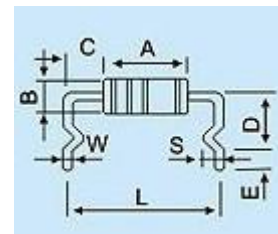

2. S-106F Taped components lead cutting forming machine (F-K type)

Model: S-106F

Voltage: AC 220V 60Hz/50Hz




Size: L580*W450*H350MM

Weight: 70kg

Efficiency: 7200PCS/H

Characteristic:

- 1 suitable for tape resistor, diodes and other axial parts forming, cutting.
- 2 suitable for mass production, stable quality, easy to operate.
- 3 ultra precision splitter, make it molding and lead cutting complete meanwhile.
- 4 cutting tool, die using Japanese imported steel, long service life
- 5 motor of Taiwan VTV.
- 6 can be customized according to customer requirements mold.
- 7 equipment body steel plate with high quality steel, solid, thick.
- 8 surface blue paint for the special process, not easy to scrape off

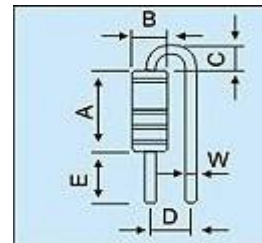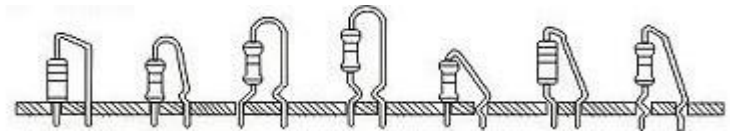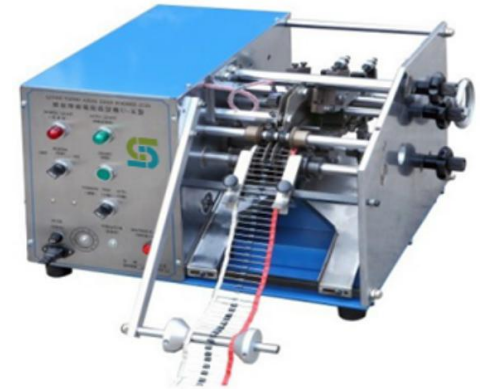

F-K type

	Description	FK type	Noted
A	Body length	3. 8-20	Adjustable
B	Body size	1. 8-9	Adjustable
C	Shoulder height	2.5	Adjustable
L	Leads' span	Adjustable	Adjustable (Can custom span)
	Lead length	Adjustable	Fixed
W	Wire diameter	0.35-1.3	0.35-0.5;0.6-0.8;0.9-1.0;1.0-1.3
Unit: MM			



Welcome inquiry

- 1, Please visit : www.smthelp.com
- 2, Find us more: <https://www.facebook.com/autoinsertion>
- 3, Know more our team: <https://cn.linkedin.com/in/smtsupplier>
- 4, Welcome to our factory in Shenzhen China
- 5, Google: Auto+Insertion
- 6, Looking forward to your email: chan@smthelp.com